


**Pro-Glas**  
FIBERGLASS FABRICATION

# Rbox

INSULATED ENCLOSURES

Residential • Light Commercial • Commercial

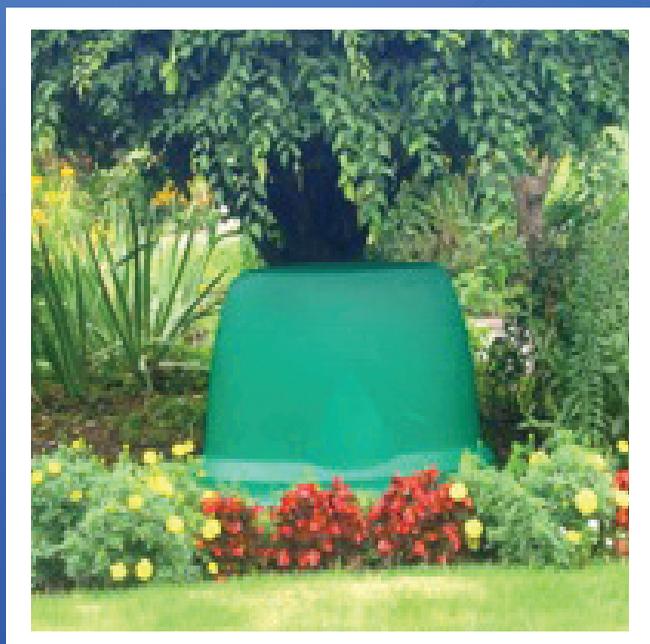

# Residential/Light Commercial Insulated Polyethylene Covers

**POLYETHYLENE:** Lightweight yet durable thermoformed plastic with built-in UV protection

**HARDWARE:** Cover is secured to the ground with stakes (included)

**OPTIONAL BASE:** Cover may be secured to optional fiberglass base with stainless steel screws (provided) and then buried at ground level or staked for stability.

**THERMAL RESISTANCE:** R=7.25 per one inch of foam

**COLORS:** Covers offered in Green and Beige

**WARRANTY:** Pro-Glas stands behind all of their products and guarantees them to be free from defects in materials and workmanship for one year from date of purchase. Defective products will be replaced or repaired after inspection and at the discretion of Pro-Glas, Inc. This warranty does not include damage from abuse, accident or misuse.



LP3615



LP2613



OPTIONAL BASE

## Polyethylene Dimensions

MODEL	INSIDE	OUTSIDE	FLANGE	OPTIONAL BASE
LP 2613	26" x 13" x 22"	28" x 15" x 25"	36" x 21"	40" x 25" x 3"
LP 3615	36" x 15" x 26"	38" x 17" x 29"	47" x 24"	51" x 28" x 3"

# Commercial Series Insulated Fiberglass Enclosures

**FIBERGLASS:** A 3/16 inch fiberglass construction provides a stronger, lightweight and rustproof composite.

**FOAM LINER:** A one-inch rigid polyurethane foam liner provides an excellent bond to the fiberglass cover, providing protection from freezing. Additional foam may be added for increased insulation.

R = 6.72 per one inch of foam (standard) or R =10 for 1.5" foam (optional)

**GEL COAT/COLORS:** High-grade marine gel coat provides excellent UV protection and durability against the elements. Available in Green or Beige.


**ASSE:** Meets ASSE standards. (Certification pending)

**HARDWARE:** Model CS6442 comes with hinges, lockable "T" handle, and support arms for easy access and safety while maintenance is being performed. Smaller models come with continuous hinge and padlock hasp for security. (Padlock not included)

**OPTIONAL VENTS:** Two 6" x 8" polished stainless steel louvered vents relieve heat and moisture buildup inside enclosure.

**OPTIONAL HEAT:** Self-regulated waterproof 6' or 12' heat cable is available for smaller models. Cable is easily installed and adjusts automatically to temperature change. A 1500 watt heater with fan and thermostat is available for model CS6442.

**WARRANTY:** Pro-Glas stands behind all of their products and guarantees them to be free from defects in materials and workmanship for one year from date of purchase. Defective products will be replaced or repaired after inspection and at discretion of Pro-Glas, Inc. This warranty does not include damage from abuse, accident, or misuse.

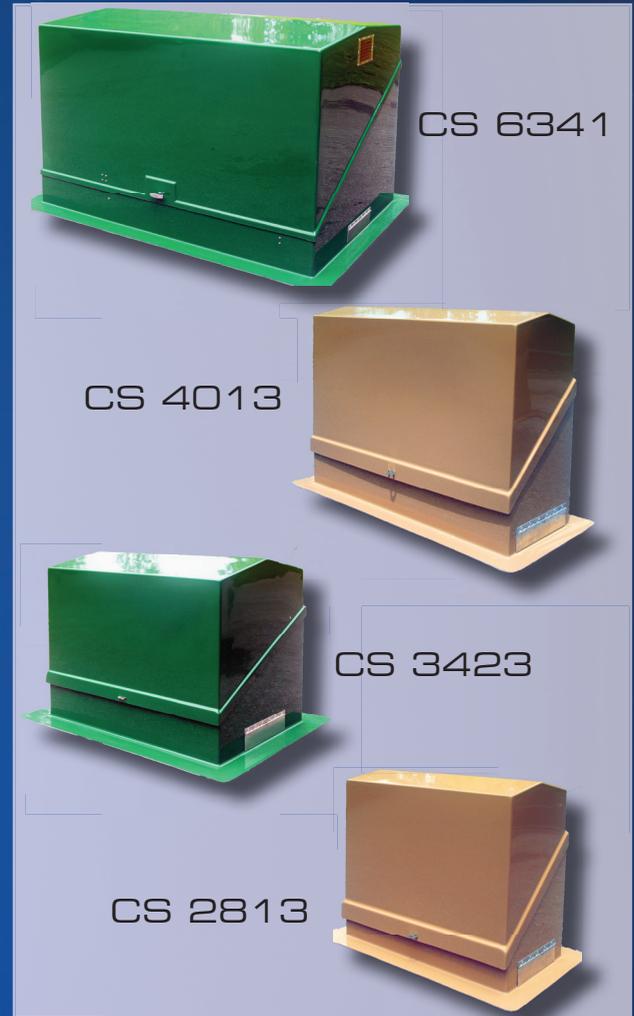

Vent



Drain



T-Handle



Hasp



## Commercial Dimensions

MODEL	INSIDE	OUTSIDE	PAD DIMENSIONS
CS 6442	64" x 42" x 41"	66" x 44" x 42"	76" x 54"
CS 4013	40" x 13" x 30"	42" x 15" x 31"	50" x 23"
CS 3423	34" x 23" x 27"	36" x 25" x 28"	44" x 35"
CS 2813	28" x 13" x 25"	30" x 15" x 26"	38" x 23"



ProGlasInc.com

(479) 381-6989

Email: [Rbox@ProGlasInc.com](mailto:Rbox@ProGlasInc.com)

Fax: (479)636-0042

